


## InteliLite 4 AMF 8

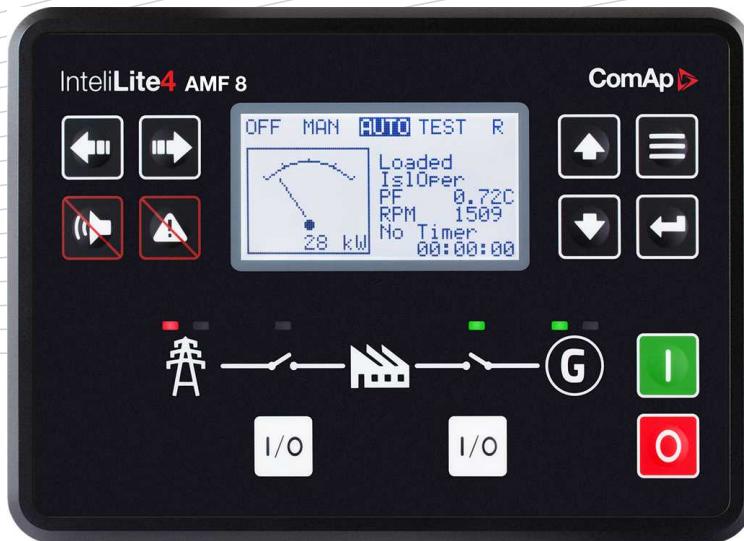

Order code: IL4AMF8XBAA

### Controller for single gen-set applications

# Datasheet

## Product description


- ▶ Single Gen-set controller for stand-by and prime-power applications
- ▶ All-in-one intuitive & powerful PC tool for configuration/monitoring/control, locally or remotely
- ▶ Easy to install, configure and use

## Key features


- ▶ Stand-by and prime-power application in one unit
- ▶ 6 binary outputs, 6 + 1 binary inputs, 3 analog inputs (U/I/R)
- ▶ +5 V output reference for analog inputs
- ▶ 2 high-current E-Stop binary outputs
- ▶ 1 slot for extension plug-in module (Modbus, Internet, SMS, inputs/outputs)
- ▶ Extension CAN modules
- ▶ ECU support (Tier 4 Final, Stage V)
- ▶ RTC with battery back-up (full calendar)
- ▶ Power over USB for controller configuration
- ▶ Zero power mode
- ▶ True RMS measurement
- ▶ In-built PLC, complemented with a PLC monitoring tool in InteliConfig
- ▶ Full remote communications support (AirGate 2.0, WSV)
- ▶ Internet access using Ethernet / 4G, Modbus TCP/RTU, SNMP v1/v2c
- ▶ Active SMS and emails
- ▶ Detailed history log with up to 150 records
- ▶ Remote display
- ▶ User setpoints and protections

- ▶ 5 languages in the controller & Translator functionality
- ▶ User Access Management
- ▶ Cyber security improvement
- ▶ Alternative configurations
- ▶ Multi-purpose schedulers
- ▶ 3 maintenance timers
- ▶ Modbus register mapping possibility
- ▶ Fuel pump management
- ▶ Run Hours source selector
- ▶ Cut-out: 172 × 112 mm

## Application overview

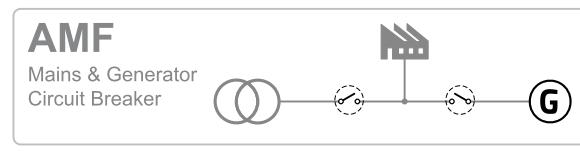

## Dimensions, terminals and mounting

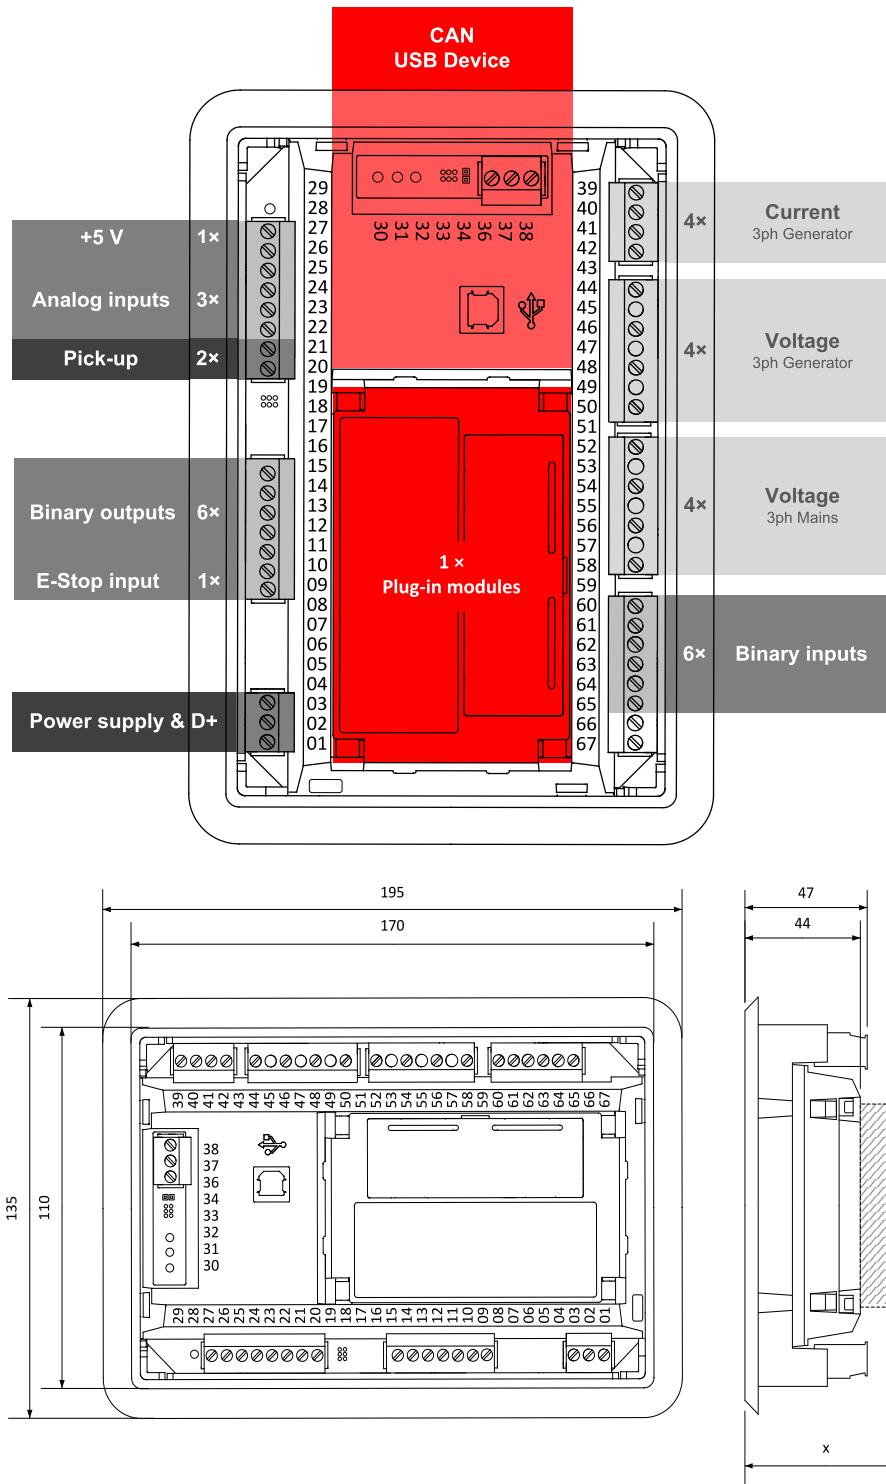

**Note:** The final depth of the controller depends on the selected plug-in module – it can vary between 41 mm and 56 mm. Mind also the size of connectors and cables (e.g. in case of RS232 connector, add about 60 mm more for standard RS232 connector and cable).

**Note:** The controller is to be mounted into panel doors as a standalone unit using provided holders. The requested cutout size is 172 x 112 mm. Use the screw holders delivered with the controller to fix the controller into the door.

## Power supply

Power supply range	8-36 VDC
Power consumption (without modules)	2.5 W
RTC battery	Replaceable (3 V)
Fusing power	4 A w/o BOUT consumption
E-Stop fusing	10 A
Max. Power Dissipation	7 W

## Operating conditions

Protection degree (front panel)	IP 65
Operating temperature	-20 °C to +70 °C
Storage temperature	-30 °C to +80 °C
Operating humidity	95 % non-condensing (EN 60068-2-30)
Vibration	5-25 Hz, ± 1.6 mm 25-100 Hz, a = 4 g
Shocks	a = 500 m/s <sup>2</sup>
Surrounding air temperature rating	70 °C
Suitable for pollution degree	2

## D+

Max. output current	250 mA
Charging fail threshold	80 % of Usupply

## Voltage measurement

Measurement inputs	3ph-n Gen voltage , 3ph-n Mains
	10-277 V AC / 10-480 V AC (EU)
Measurement range	10-346 V AC / 10-600 V AC (US/Canada)
Linear measurement and protection range	350 V AC Ph-N 660 V AC Ph-Ph
Accuracy	1 %
Frequency range	30-70 Hz (accuracy 0.1 Hz)
Input impedance	0.72 MΩ ph-ph , 0.36 MΩ ph-n

## Display

Type	Build-in monochromatic 3.2"
Resolution	132 × 64 px

## Communications

USB Device	Non-isolated type B connector
CAN 1	Non-isolated, 250 / 50 kbps, Terminator impedance 120 Ω

## Current measurement

Measurement inputs	3ph Gen current
Measurement range	5 A
Max. allowed current	10 A
Accuracy	±20 mA for 0-2 A; 1 % of value for 2-5 A
Input impedance	<0.1 Ω

## E-Stop

Dedicated terminal for safe E-Stop input.  
Physical supply for binary outputs 1 & 2.

## Binary inputs

Number	6
Close/Open indication	0-2 VDC close contact 6-36 VDC open contact

## Binary outputs

Number	6
Max. current	BO1,2 = 5 A; BO3-6 = 0.5 A
Switching to	positive supply terminal

## Analog inputs

Number	3, switchable (R/U/I)
Range	R = 0-2500 Ω; U = 0-10 V; I = 0-20 mA
Accuracy	R: ±2 % from value ±5 Ω in range 0-250 Ω R: ±4 % from value in range 250 Ω-2500 Ω U: 1 % from value ±100 mV I: 1 % from value ±0.2 mA

## +5 V Power supply output

Max. current	45 mA
--------------	-------

## Magnetic pickup

Voltage input range	4 Vpk-pk to 50 Vpk-pk in range 4 Hz to 1 kHz 6 Vpk-pk to 50 Vpk-pk in range 1 to 5 kHz 10 Vpk-pk to 50 Vpk-pk in range 5 to 10 kHz
Frequency input range	4 Hz to 10 kHz
Frequency measurement tolerance	0.2 % from measured value

## Available plug-in modules

Product	Description	Order code
CM-RS232-485	Dual port interface	<a href="#">CM223248XBX</a>
CM2-4G-GPS	4G & GPS plug-in communication module	CM24GGPSXBX
CM3-Ethernet	Internet / Ethernet plug-in communication module	CM3ETHERXBX
EM-BIO8-EFCP	8 additional binary inputs/outputs	<a href="#">EM2BIO8EXBX</a>

**Note:** Controller has 1 slot for plug-in modules.

## Available CAN modules

Product	Description	Order code
IGL-RA15	CAN remote annunciator with 15 LEDs	<a href="#">EM2IGLRABAA</a>
Inteli AIN8	CAN module with 8 analog inputs	I-AIN8
Inteli IO8/8	CAN module with 8 binary inputs and 8 binary outputs	I-IO8/8
IGS-PTM	CAN module with 8 binary inputs, 8 binary outputs, 4 analog inputs and 1 analog output	IGS-PTM
Inteli AIN8TC	CAN module with 8 analog inputs dedicated for thermocouple sensors only.	I-AIN8TC
Inteli AIO9/1	CAN module with analog inputs and outputs – designed for DC measurement.	I-AIO9/1

## Functions and protections

Support of functions and protections as defined by ANSI (American National Standards Institute):

Description	ANSI code	Description	ANSI code
Master unit	1	Overcurrent	50/50TD
Stopping device	5	Overcurrent IDMT	51
Underspeed	14	AC circuit breaker	52
Starting-to-running transition contractor	19	Overtvoltage	59
Thermal relay	26	Pressure switch	63
Undervoltage	27	Liquid level switch	71
Annunciator	30	Alarm relay***	74
Overload(real power)	32P	Reclosing relay	79
Master sequence device	34	Auto selective control/transfer	83
Incomplete sequence relay	48		

\*\*\* extension module IGL-RA15 required

## Certifications and standards

<ul style="list-style-type: none"> <li>▶ EN 61000-6-2</li> <li>▶ EN 61000-6-4</li> <li>▶ EN 61010-1</li> <li>▶ EN 60068-2-1 (-20 °C/16 h)</li> <li>▶ EN 60068-2-2 (70 °C/16 h)</li> </ul>	<ul style="list-style-type: none"> <li>▶ EN 60068-2-6 (2÷25 Hz / ±1,6 mm; 25÷100 Hz / 4.0 g)</li> <li>▶ EN 60068-2-27 (a=500 m/s<sup>2</sup>; T=6 ms)</li> <li>▶ EN 60068-2-30:2005 25/55°C, RH 95%, 48hours</li> <li>▶ EN 60529 (front panel IP65, back side IP20)</li> </ul>	
---	--	---

